Productos Jafep, S.L.
Carretera de Barrax, s/n (Frente Estación Ferrocarril)
Tel.: +34 967 44 05 96 • **Fax:** +34 967 44 26 12
Apartado de correos nº 70
02630 La Roda (AB) **España**

ACRIMAR. WATER-BASED ACRYLIC ENAMEL

Technical specification

DESCRIPTION

Water-based acrylic enamel with easy application and excellent levelling properties. Washable, odourfree, non-flammable and eco-friendly. Non-yellowing. It offers an exceptional hardness and friction resistance.

TECHNICAL CHARACTERISTICS:

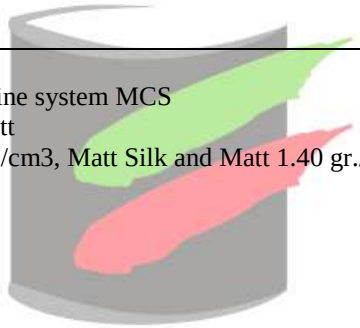

Nature: Acrylic copolymers.
Colour: White and Bases from tinting machine system MCS
Appearance: Gloss, Satin, Matt Silk and Matt
Density: Gloss: 1.20 gr./cm3, Satin: 1.30 gr./cm3, Matt Silk and Matt 1.40 gr./cm3.
Touch dry: 30 minutes
Recoatable: 6 hours.
Coverage: 12 – 14 m2/litre
Thinning: Water
Application: Brush, roller or spray.
Tinting: Universal dye Jafep or Water-based dye Jafep.

APPLICATION

To apply on both interior and exterior supports. Extremely suitable for decorating and protecting surfaces made of iron, masonry, wood, plaster, etc., such as: doors, chairs, tables, windows, walls, furniture, railings, metal structures, etc. And of course kitchens and bathrooms.
The practical spreading rate will depend on the actual dry film thickness, the nature of the substrate and the application method.

INSTRUCTIONS FOR USE

Stir the content of the packaging. Apply by brush, roller or spray on clean, dry and free from dust, duly prepared.

- Painted surfaces: Surfaces in good condition, clean and sand down and apply directly ESMALTE ACRÍLICO AL AGUA ACRIMAR (WATER-BASED ACRYLIC ENAMEL). Otherwise, remove totally the old paint and proceed like a new surface.

- New surfaces:
  Wood: Apply a coat of Multiusos al agua (Water-based multipurpose) or Water-based Sealer.
  Metal: Apply a coat of Multiusos al agua (Water-based multipurpose) or Water-based anti-corrosive primer.
  Wall: Apply directly "Acrimar" or paint previously with Sellacryl.

- Do not apply at temperatures below 5 ºC. Nor apply at excessively high temperatures.
- Wash tools with water immediately after use.

SUBMITTALS

Plastic packaging: 750mL. and 4 Litres

The information contained in this document serves as a guide for the user but offers no guarantee. For information relating to safety and the environment, please consult the Safety Data Card.