




Colour Reviver and Protector for faded Black Limestone surfaces

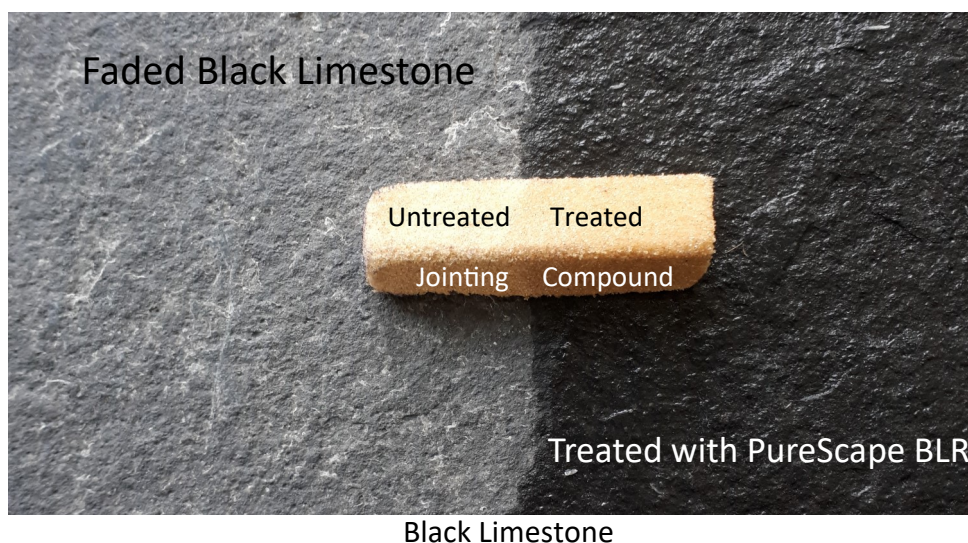

PRODUCT DESCRIPTION

PureScape® BLR forms a hard durable finish that chemically reacts with the substrate.

The special design of different molecular weight polymers enables superior performance.

A stain resistant, water repellent, colour enhancer which improves the overall visual appearance of the substrate.

A surface treated with **PureScape® BLR** will:

- remain moisture vapour permeable
- allow stains to be easily cleaned

- become water repellent
- able to be re-applied with itself
- provide a Colour Enhancement that embellishes and improves the overall visual appearance of the substrate
- in a single application provides a flat natural finish and with an additional application can develop a sheen finish

TECHNICAL DATA

- Invisible once dry
- Non-hazardous
- Fully biodegradable
- UV-resistant
- Odour: low and pleasant
- Consistency: Low viscosity liquid
- Vapour permeable
- Solvent free
- VOC content: 0gm/L
- Colour: Pale Straw
- Density: 1.03kgs/Ltr @ 25°C.
- Combustibility: Non-combustible



CHEMICAL PROPERTIES

Silane/siloxane resin network

PERFORMANCE

Ground surface: 5 to 10 years depending on the degree of foot traffic.

APPLICATION INSTRUCTIONS

"Always test apply on a small hidden portion of the substrate. This needs to include any grout or jointing compound as well"

APPLICATION DETAILS:

- Substrate Preparation: Clean, free from dust, dirt, oil, efflorescence, organic growth and old coating films.
- **PureScape® BLR** may be applied using a short pile roller or paint pad.
- Subsequent applications should be applied within 20 minutes of the first application.
- **PureScape® BLR** will not perform if applied over non-absorbent surfaces.
- Substrate Temperature: +10°C to +25°C.
- Ambient Temperature: +10°C to +25°C.

COVERAGE RATE

Coverage depends on the porosity of the substrate. The values below are given only as an indication:

- Black Limestone: up to 30 m²/litre

PACKAGING

1L containers

EQUIPMENT CLEANING

Clean tools and equipment immediately after use with water

STORAGE & SHELF LIFE

Store away from frost and heat in a dry place: temperature between 5 °C and 30 °C. Shelf life is 24 months from the production batch date when kept in the original unopened container .

APPROVED CONTRACTORS

Approved Contractor training in product application is available upon request. Please contact Rocan Products Ltd for further details..

RECOMMENDATIONS & CURING

- Wear protective gloves and glasses, and appropriate clothing whilst using the product.
- Curing Treatment: Do not apply **PureScape® BLR** rain is expected within 4 hours. Water repellence is evident after initial curing but may take up to 7 days to reach 100% efficiency.
- Notes: The technical data provided is based on laboratory tests and some variations may occur on large areas and unknown substrates.
- Not suitable to apply on non-porous substrates such as polished natural stone, quarry tiles and engineering bricks.

HEALTH & SAFETY

See Material Safety Data Sheet before use.

Important: The content of this documentation is based on our experience of the product. Rocan Products Ltd guarantees the quality of its products, but expressly declines any liability in the event of failure by the user to comply with the recommendations and conditions of use of said products, notably but not exclusively in the event of incorrect application, application by unqualified personnel, use of products not compatible with Rocan's products or bad weather conditions. For further information, refer to the safety data sheet.

ROCAN PRODUCT CODE: R-186

Date of last update: 01.09.17



www.rocan.co.uk — Tel: 01256-211278—sales@rocan.co.uk

Rocan Products Ltd, Grove House, Lutyens Close, Basingstoke, Hants RG24 8AG

Company No 8933542 Registered in England & Wales

