

# smaltoxyl hydro



PROTECTIVE AND DECORATIVE WATER BASED VARNISHES!  
For indoor and outdoor wooden surfaces.



# Smaltoxyl hydro



Wood is a timeless elegant choice as a construction or decorative material. It is a "living" material, a genuine part of nature in your space, and as such, it is extremely sensitive. It is porous, it "breathes", which means it can be easily altered and needs protection against light, water, temperature fluctuations, fungi and other wood diseases. VECHRO's leading Smaltoxyl Hydro protection system is the best choice! A complete range of water-soluble products that provide complete protection and renewal to exterior or interior wooden structures and cover the wide range of conditions surrounding them.

**The new Smaltoxyl Hydro packages**  
they are designed to make it easier for professional and private consumers to easily choose the right product, based on the type of wooden surface they want to work on and the protection they need. Each package is distinguished by its individual colour and name, clearly illustrating the indicative application areas and technical characteristics of each product.

## Smaltoxyl Hydro Ecological Varnish

Ecological Water Base Varnish - For Wood

- Low build, does not flake.
- Microporous, waterproofing and allowing the wood to "breathe".
- Suitable for children's toys (Standard EN 71-30)



## Smaltoxyl Water Based Wood Preservative

Water Based Wood Preservative

- Protects against wood-decay fungi and blue stains
- It maintains and penetrates the wood
- It allows wood to "breathe"



## Smaltoxyl Hydro Teak Oil

Water Based Teak Oil

- Water resistance and mould protection
- UV filters for protection against UV radiation
- Protection against stains
- Fast drying



## Smaltoxyl Hydro Decking Oil



Hybrid Water Based Decking Oil

Resistance to chlorinated water and seawater ■

Resistance to mould ■

High resistance to adverse weather conditions ■



YIELD  
 $10 \pm 2 \text{ m}^2/\text{lt}$



COATS  
2-3



DRYING  
 $\frac{1}{2}-1\text{h}$



DILUTION  
0%

## Smaltoxyl Hydro Parquet Varnish



Polyurethane Floor Varnish

Polyurethane PU technology ■

Scratch resistant ■

Fast drying ■

Elasticity and hardness ■



YIELD  
 $12-14 \text{ m}^2/\text{lt}$



COATS  
2



DRYING  
 $\frac{1}{2}-1\text{h}$



DILUTION  
0%

## Smaltoxyl Hydro Parquet Primer



Primer for Floor Varnishes

Fills up wood pores ■

Easy sanding ■

Fast drying ■

Strong adhesion ■



YIELD  
 $9-11 \text{ m}^2/\text{lt}$



COATS  
1-2




DRYING  
 $\frac{1}{2}-1\text{h}$



DILUTION  
8-10%

# We choose **VECHRO**, the leading company in total ecological paint Sales & Certifications since 2003!

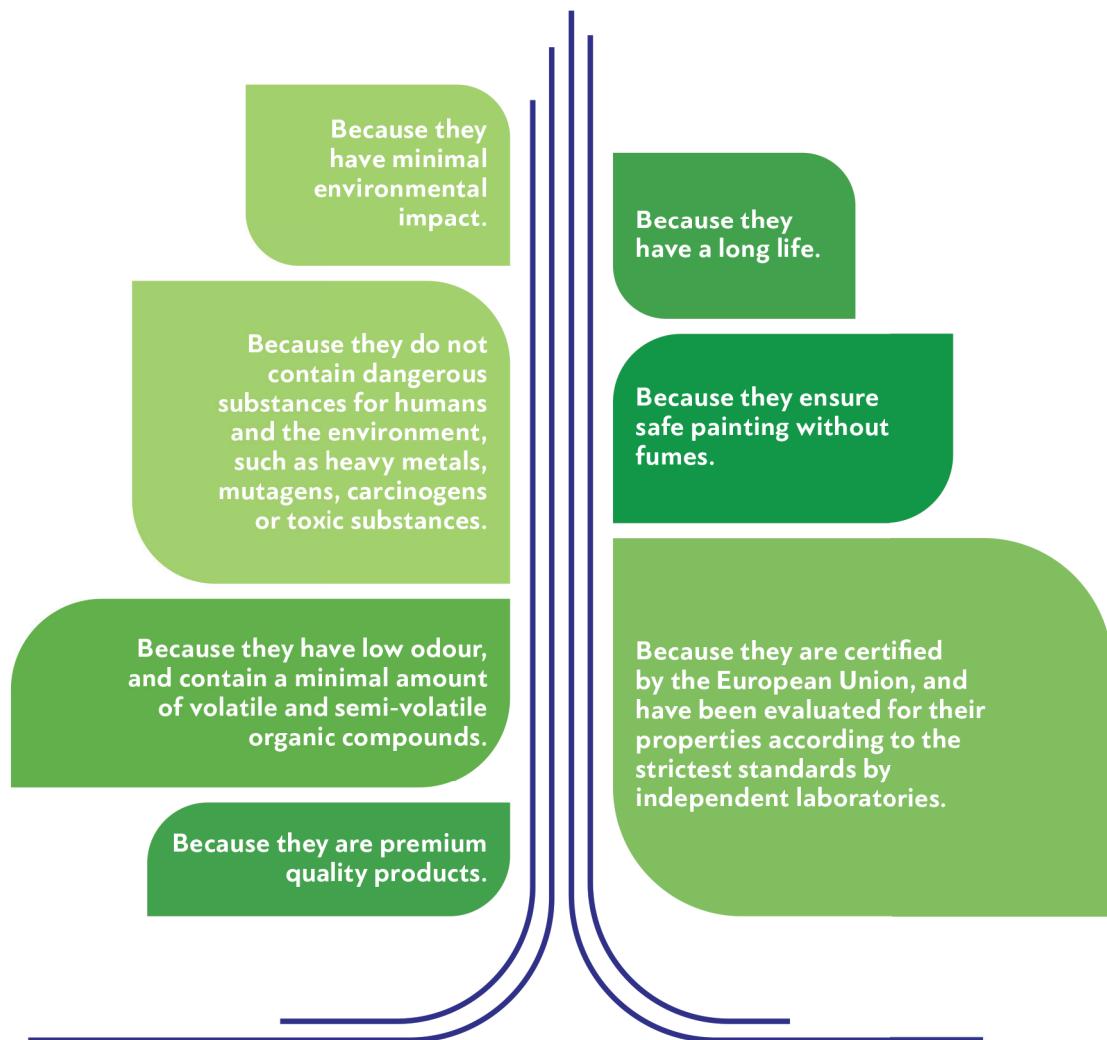

**VECHRO S.A.**  
302 Liosion Av. | 11145 Athens | **T** +30 210 48 16 101

**Northern Greece** Epirus 10th km Thessaloniki - Athens N.R.,  
570 09 Kalochori Thessaloniki | **T** + 30 2310 784 300

**E** info@vechro.gr | [www.vechro.gr](http://www.vechro.gr)  
**@** vechro | **f** vechrogr



E206 E208.10.19